




Features


CBB61A Motor Run Capacitor Plastic can Box type flexible wire

All of its performance indexes reach the requirements of IEC252 criterion. With its good self-healing characteristic long life-span and high proportionality, it is widely used as the start-up and running capacitor that is special for electric appliances such as electric fanners, ventilators and exhaust fanners.

Capacitor Drawing

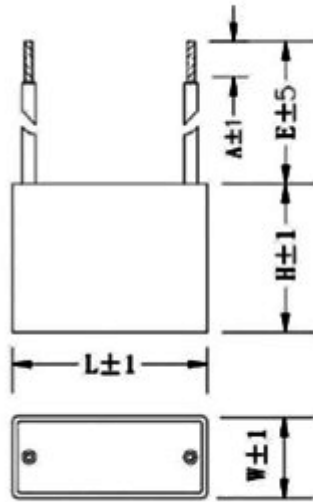

CBB61A-1

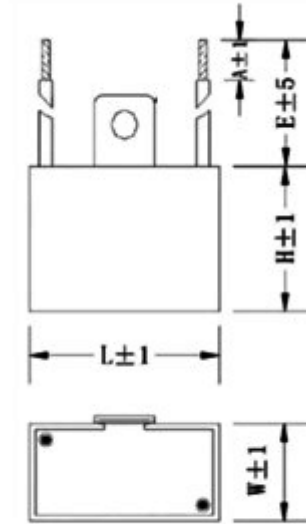

CBB61A-2

Specification

| | |
|--------------------------------|--|
| Working Temperature Range | 40/85/21, 25/70/21 |
| Rated Voltage Range | 200-500Vac |
| Rated Capacitance Range | 1 μ F – 30 μ F |
| Dissipation Factor | Tan \leq 0.002 (50Hz) |
| Rated Tolerance of capacitance | \pm 5%, \pm 10% |
| Withstand voltage | intensity Pole-pole Rated voltage \times 2 /10S Pole-Shell \times 2+ 1000V Min 2000V.AC Insulation resistance T-T RC \geq 4000S |
| Reference standard | IEC 60252-1 |


CBB61 Motor Run Capacitor

Model : CBB61A

Packing and Mark

CINCO

5 μ F \pm 5% CBB61
450V.AC SH P0
50/60 Hz DB C
25/070/21 **CE**

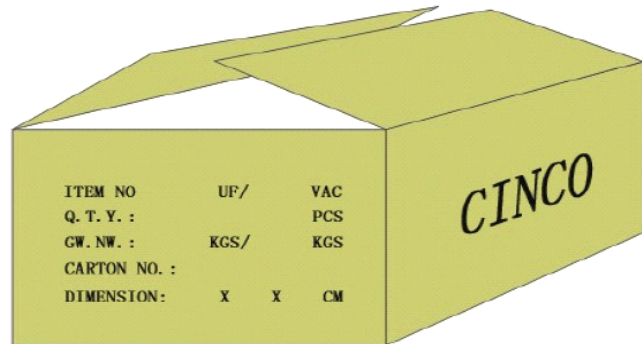

Dimensions

| Capa ci- tance | 400 VAC – 450VAC | | | | | | 250 VAC – 300VAC | | | | | |
|----------------------|------------------|-------------|-----------|-------------|-----------|-------------|------------------|-------------|-----------|-------------|-----------|-------------|
| | L (mm) | L (Inch) | W (mm) | W (Inch) | H (mm) | H (Inch) | L (mm) | L (Inch) | W (mm) | W (Inch) | H (mm) | H (Inch) |
| 1 μ F | 37 | 1.46" | 15 | 0.59" | 26 | 1.02" | 37 | 1.46" | 15 | 0.59" | 26 | 1.02" |
| 1.5 μ F | 37 | 1.46" | 15 | 0.59" | 26 | 1.02" | 37 | 1.46" | 15 | 0.59" | 26 | 1.02" |
| 2 μ F | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" | 37 | 1.46" | 15 | 0.59" | 26 | 1.02" |
| 2.5 μ F | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" | 37 | 1.46" | 15 | 0.59" | 26 | 1.02" |
| 3 μ F | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" | 37 | 1.46" | 15 | 0.59" | 26 | 1.02" |
| 3.5 μ F | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" | 37 | 1.46" | 15 | 0.59" | 26 | 1.02" |
| 4 μ F | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" | 37 | 1.46" | 15 | 0.59" | 26 | 1.02" |
| 4.5 μ F | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" | 37 | 1.46" | 15 | 0.59" | 26 | 1.02" |
| 5 μ F | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" |
| 6 μ F | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" |
| 7 μ F | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" |
| 8 μ F | 50 | 1.97" | 23 | 0.91" | 40 | 1.57" | 47 | 1.85" | 18 | 0.71" | 34 | 1.34" |
| 10 μ F | 48 | 1.89" | 28 | 1.10" | 34 | 1.34" | 50 | 1.97" | 23 | 0.91" | 40 | 1.57" |
| 12 μ F | 48 | 1.89" | 28 | 1.10" | 34 | 1.34" | 50 | 1.97" | 23 | 0.91" | 40 | 1.57" |
| 15 μ F | 60 | 2.36" | 28 | 1.10" | 42 | 1.65" | 50 | 1.97" | 23 | 0.91" | 40 | 1.57" |
| 18 μ F | 48 | 1.89" | 28 | 1.10" | 34 | 1.34" | 48 | 1.89" | 28 | 1.10" | 34 | 1.34" |
| 20 μ F | 60 | 2.36" | 38 | 1.50" | 50 | 1.97" | 48 | 1.89" | 28 | 1.10" | 34 | 1.34" |
| 25 μ F | 60 | 2.36" | 38 | 1.50" | 50 | 1.97" | 60 | 2.36" | 38 | 1.50" | 50 | 1.97" |
| 30 μ F | 60 | 2.36" | 38 | 1.50" | 50 | 1.97" | 60 | 2.36" | 38 | 1.50" | 50 | 1.97" |



if you could not find your item of above, you could contact me by email at sales@china-capacitores.com Special specification are available on request.