


## Features

### CBB61B Motor Run Capacitor plastic box type single or double faston

All of its performance indexes reach the requirements of IEC252 criterion. With its good self-healing characteristic long life-span and high proportionality, it is widely used as the start-up and running capacitor that is special for electric appliances such as electric fanners, ventilators and exhaust fanners.

## Capacitor Drawing

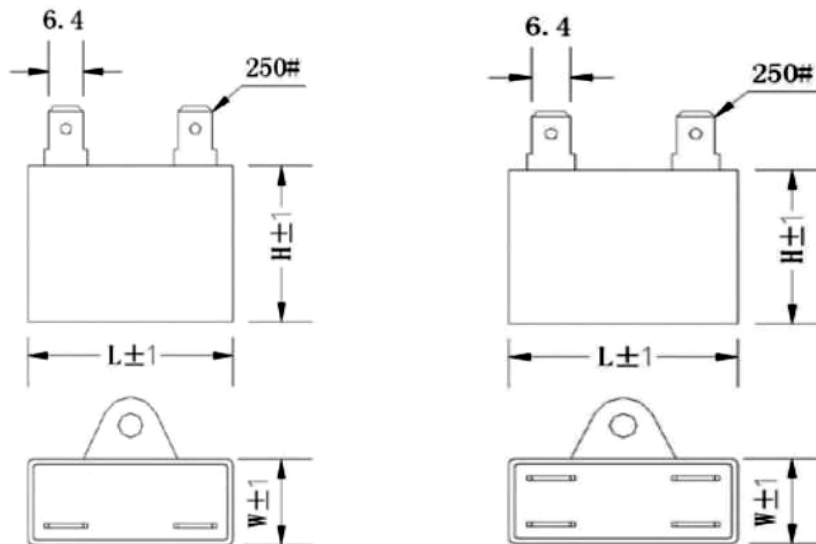

## Specification

Working Temperature Range	40/85/21, 25/70/21
Rated Voltage Range	200-500Vac
Rated Capacitance Range	1 $\mu$ F – 30 $\mu$ F
Dissipation Factor	Tan $\leq$ 0.002 (50Hz)
Rated Tolerance of capacitance	$\pm$ 5%, $\pm$ 10%
Withstand voltage	intensity Pole-pole Rated voltage $\times$ 2 /10S Pole-Shell $\times$ 2+ 1000V Min 2000V.AC Insulation resistance T-T RC $\geq$ 4000S
Reference standard	IEC 60252-1


# CBB61 Motor Run Capacitor

# Model : CBB61B

## Packing and Mark

**CINCO**

5 $\mu$ F  $\pm$ 5% CBB61  
450V.AC SH P0  
50/60 Hz DB C  
25/070/21 **CE**

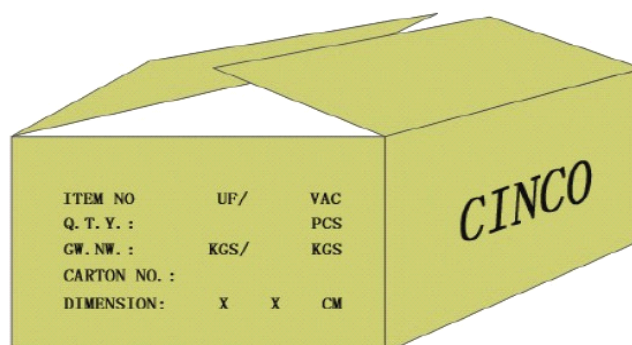

## Dimensions

Capacitance	400 VAC – 450VAC						250 VAC – 300VAC					
	L (mm)	L (inch)	W (mm)	W (inch)	H (mm)	H (inch)	L (mm)	L (inch)	W (mm)	W (inch)	H (mm)	H (inch)
1 $\mu$ F	37	1.46"	15	0.59"	26	1.02"	37	1.46"	15	0.59"	26	1.02"
1.5 $\mu$ F	37	1.46"	15	0.59"	26	1.02"	37	1.46"	15	0.59"	26	1.02"
2 $\mu$ F	47	1.85"	18	0.71"	34	1.34"	37	1.46"	15	0.59"	26	1.02"
2.5 $\mu$ F	47	1.85"	18	0.71"	34	1.34"	37	1.46"	15	0.59"	26	1.02"
3 $\mu$ F	47	1.85"	18	0.71"	34	1.34"	37	1.46"	15	0.59"	26	1.02"
3.5 $\mu$ F	47	1.85"	18	0.71"	34	1.34"	37	1.46"	15	0.59"	26	1.02"
4 $\mu$ F	47	1.85"	18	0.71"	34	1.34"	37	1.46"	15	0.59"	26	1.02"
4.5 $\mu$ F	47	1.85"	18	0.71"	34	1.34"	37	1.46"	15	0.59"	26	1.02"
5 $\mu$ F	47	1.85"	18	0.71"	34	1.34"	47	1.85"	18	0.71"	34	1.34"
6 $\mu$ F	47	1.85"	18	0.71"	34	1.34"	47	1.85"	18	0.71"	34	1.34"
7 $\mu$ F	47	1.85"	18	0.71"	34	1.34"	47	1.85"	18	0.71"	34	1.34"
8 $\mu$ F	50	1.97"	23	0.91"	40	1.57"	47	1.85"	18	0.71"	34	1.34"
10 $\mu$ F	48	1.89"	28	1.10"	34	1.34"	50	1.97"	23	0.91"	40	1.57"
12 $\mu$ F	48	1.89"	28	1.10"	34	1.34"	50	1.97"	23	0.91"	40	1.57"
15 $\mu$ F	60	2.36"	28	1.10"	42	1.65"	50	1.97"	23	0.91"	40	1.57"
18 $\mu$ F	48	1.89"	28	1.10"	34	1.34"	48	1.89"	28	1.10"	34	1.34"
20 $\mu$ F	60	2.36"	38	1.50"	50	1.97"	48	1.89"	28	1.10"	34	1.34"
25 $\mu$ F	60	2.36"	38	1.50"	50	1.97"	60	2.36"	38	1.50"	50	1.97"
30 $\mu$ F	60	2.36"	38	1.50"	50	1.97"	60	2.36"	38	1.50"	50	1.97"

? if you could not find your item of above, you could contact me by email at [sales@china-capacitores.com](mailto:sales@china-capacitores.com) Special specification are available on request.